

Get into the World of General Tire

The on-road and light off-road specialists.

Grabber New Generation

GRABBER HP/UHP



Developed for fast and powerful SUV/4X4, the stars of the Grabber family are high achievers, providing safe driving on asphalt roads as well as in light off-road conditions. With their advanced tread patterns, top quality constructions, their wide size range of 15"-24" rim diameters and speed capabilities up to 270 km/h (168 mph), the Grabber HP/UHP don't just look good; they offer top performance in their segment!

Vehicle Examples


BMW	LAND ROVER
CHRYSLER	MERCEDES
FORD	TOYOTA
KIA	VOLKSWAGEN



GENERALTIRE

GRABBER HP/UHP – The guarantee for safe performance

The new tread patterns are characterised by steep, extended grooves from shoulder to centre and siped sturdy tread lugs. The design, in combination with advanced silica tread compounds, and a reinforced construction, make the HP/UHP tyres comfortable, durable and extremely safe in both wet and dry conditions.

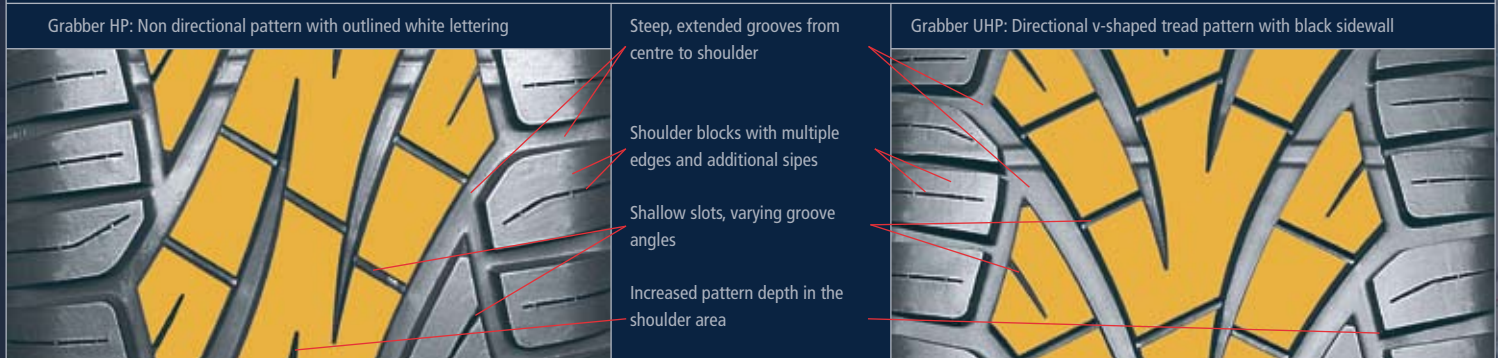

Features

- 1 Steep, extended grooves from centre to shoulder
- 2 Shoulder blocks with multiple edges and additional sipes
- 3 Shallow slots, varying groove angles and increased pattern depth in the shoulder area
- 4 Optimised tyre contour with focus on flat belt and reinforced construction
- 5 High performance silica tread compound

Benefits

- 1 Very good water displacement; reduces the risk of aquaplaning
- 2 Grip + braking optimisation and smooth rolling; excellent handling and comfort and noise improvement
- 3 Even wear pattern and increased grip edges on soft surfaces like grass or sand; good performance also in light off-road conditions
- 4 Excellent mileage performance and comfort improvement for higher speed (speed symbols up to V and W)
- 5 High grip, for excellent handling, braking and traction in dry and wet

PATTERN	RIM DIA-METER	SIZE	SPEED/LOAD INDEX	LOAD RANGE	SIDE-WALL	RIM PROTECTION	PERMITTED RIMS WIDTH		TYRE DIMENSIONS		TREAD PATTERN DEPTH (MM)	ROLLING CIRCUMFERENCE 1,5%-2,5% (MM)
							MIN. (INCH)	MAX.	MAX. IN SERVICE OUTER-Ø (MM)	ON MEASURING RIM WIDTH (MM)		
HP	15	195/80 R 15	96 H		BSW	FR	5.0	6.5	705	204	8.5	2114
	15	235/60 R 15	98 T		OWL	FR	6.5	8.5	675	250	8.7	2020
	15	255/60 R 15	102 T		OWL	FR	7.0	9.0	699	270	8.7	2095
	15	275/60 R 15	107 T		OWL	FR	7.5	9.5	725	290	8.7	2170
UHP	15	205/70 R 15	96 H		BSW		5.0	7.0	681	217	8.7	2040
	15	265/70 R 15	112 H		BSW		7.0	9.0	767	282	8.7	2297
	16	215/70 R 16	100 H		BSW		5.0	7.0	720	230	8.7	2159
	16	225/70 R 16	102 H		BSW		6.0	7.5	734	237	8.7	2202
	16	235/70 R 16	106 H		BSW		6.0	8.0	750	250	8.7	2245
	16	245/70 R 16	107 H		BSW		6.0	8.0	764	258	8.7	2287
	16	265/70 R 16	112 H		BSW		7.0	9.0	792	283	8.7	2373
	16	275/70 R 16	114 T		BSW	FR	7.0	9.0	808	290	8.7	2416
	16	215/65 R 16	98 H		BSW		6.0	7.5	698	230	8.7	2090
	16	255/65 R 16	109 H		BSW		7.0	9.0	752	270	8.7	2251
	16	235/60 R 16	100 H		BSW		6.5	8.5	700	250	8.7	2100
	16	255/55 R 16	103 T		BSW	FR	7.0	9.0	698	276	8.7	2090
	17	225/65 R 17	102 H		BSW	FR	6.0	8.0	736	237	8.5	2205
	17	265/65 R 17	112 H		BSW	FR	7.5	9.5	790	283	8.5	2367
	17	235/65 R 17	108 V	XL	BSW	FR	6.5	8.5	750	250	8.7	2251
	17	255/60 R 17	106 V		BSW	FR	7.0	9.0	750	270	8.7	2251
	17	275/60 R 17	110 V		BSW	FR	7.5	9.5	776	290	8.5	2324
	17	225/55 R 17	97 V		BSW	FR	6.0	8.0	690	242	8.7	2075
	17	275/55 R 17	109 V		BSW	FR	7.5	9.5	746	295	8.7	2239
	17	255/50 R 17	101 V		BSW	FR	7.0	9.0	698	276	8.7	2100
	18	255/60 R 18	112 V	XL	BSW	FR	7.0	9.0	775	270	8.5	2329
	18	235/60 R 18	107 V	XL	BSW	FR	6.5	8.5	751	250	7.9	2254
	18	235/55 R 18	100 V		BSW	FR	6.5	8.5	725	255	8.5	2178
	18	255/55 R 18	109 W	XL	BSW	FR	7.0	9.0	749	276	8.7	2248
	19	255/50 R 19	107 W		BSW	FR	7.0	9.0	749	276	8.7	2260
	19	275/45 R 19	108 V	XL	BSW	FR	8.5	10.5	741	284	8.7	2230
	19	285/45 R 19	111 W		BSW	FR	9.0	10.5	749	296	8.7	2255
	20	275/55 R 20	117 V	XL	BSW	FR	7.0	9.5	822	295	8.7	2470
	20	265/50 R 20	111 V		BSW	FR	7.5	9.5	684	288	8.5	2364
	20	285/50 R 20	112 V		BSW	FR	8.0	10.0	806	309	8.7	2420
	20	295/50 R 20	118 V	XL	BSW	FR	8.0	10.5	816	321	8.7	2452
	20	305/50 R 20	120 V		BSW	FR	8.5	11.0	826	329	8.7	2485
	20	255/45 R 20	105 V	XL	BSW	FR	8.0	9.5	748	265	8.7	2248
	20	275/45 R 20	110 V	XL	BSW	FR	8.5	10.0	766	288	8.7	2305
	20	295/45 R 20	114 V	XL	BSW	FR	9.5	11.0	784	308	8.7	2360
	20	275/40 R 20	106 W	XL	BSW	FR	9.0	10.5	736	289	7.9	2220
	22	295/45 R 22	116 V	XL	BSW	FR	9.5	11.0	835	308	8.7	2516
	22	305/45 R 22	118 V	XL	BSW	FR	9.5	11.0	843	315	8.7	2540
	22	265/40 R 22	106 V		BSW	FR	9.0	10.5	779	282	8.5	2348
	22	295/40 R 22	112 V	XL	BSW	FR	10.0	11.5	805	313	8.7	2425
22	305/40 R 22	114 V	XL	BSW	FR	10.0	12.0	813	326	8.7	2450	
22	285/35 R 22	106 V		BSW	FR	9.5	11.0	767	302	8.5	2312	
23	305/40 R 23	115 V	XL	BSW	FR	10.0	12.0	838	326	8.7	2525	
24	285/40 R 24	112 V		BSW	FR	9.5	11.0	848	302	8.5	2553	
24	305/40 R 24	117 V	XL	BSW	FR	10.0	12.0	864	326	8.7	2605	
24	305/35 R 24	112 V	XL	BSW	FR	10.0	12.0	832	326	8.5	2510	
24	315/35 R 24	114 V	XL	BSW	FR	10.0	12.0	838	333	8.7	2530	