

Get into the World of General Tire

Show what your off-road vehicle can really do.

Grabber New Generation

GRABBER AT²



The Grabber AT² is a technological masterpiece. Tortured by American off-road specialists under the toughest conditions, the Grabber AT² is the result of years of developments on the most varied grounds. Smooth on asphalt, rough on loose grounds - the perfect mix.

Vehicle Examples


- | | |
|-----------|------------|
| BMW | MERCEDES |
| JEEP | MITSUBISHI |
| LANDROVER | TOYOTA |



GENERALTIRE 

GRABBER AT² – The specialist for difficult terrain

With its new tread pattern and further improved rubber compound, the Grabber AT² provides an excellent grip in all weathers. The extensive high-torsion tread lugs ensure excellent propulsion both on stony and muddy ground.

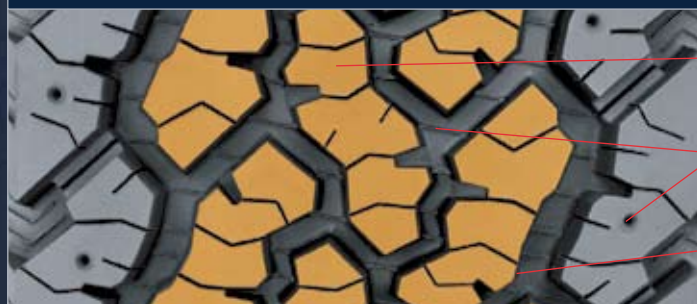

- OPTIMISED 5 ROW TREAD PATTERN
(Aggressive, Gripping, Biting, Self-Cleaning)
- PINNED FOR STUDS
- TRACTION RIDGES
(All-Terrain Traction)
- ADVANCED CUT & CHIP
RESISTANT TREAD COMPOUND
(Outstanding Traction + Handling)

Features

- 1 Optimised 5-Row Tread Pattern
- 2 Advanced Cut & Chip Resistant Tread Compound
- 3 Square Tread Contour
- 4 Traction Ridges
- 5 Rim Protector Flange
- 6 All Season Pattern Design

Benefits

- 1 Five rows of aggressive, gripping, biting, self-cleaning tread lugs for commanding performance on and off the road.
- 2 1,35 cm of the meanest, cut & chip resistant tread compound that enjoys running over rough terrain.
- 3 Nothing square about this tire except the tread contour, when shape does matter for commanding surface contact.
- 4 When the trail gets sloppy, traction ridges at the base of every groove give added traction to pull you through.
- 5 When the trail gets tough, the built in rim protector shields your cherished rims from damage and repels debris from the bead to get you back home.
- 6 Even in the winter this tyre won't let you down.

PATTERN	RIM DIA-METER	SIZE	SPEED/LOAD INDEX	LOAD RANGE	SIDE-WALL	RIM PROTECTION	PERMITTED RIMS WIDTH		TYRE DIMENSIONS		TREAD PATTERN DEPTH (MM)	ROLLING CIRCUM-FERENCE (MM)	
							MIN. (INCH)	MAX.	MAX. IN SERVICE OUTER-Ø (MM)	ON MEASURING RIM WIDTH (MM)			
AT ²	15"	205/75 R 15	97T				5.5	7.0	701	211	11,1	2101	
		215/75 R 15	100S				5.5	7.0	715	225	11,1	2144	
		225/75 R 15	102S				6.0	7.5	733	232	13,5	2193	
		235/75 R 15	109S		XL	OWL	FR	6.0	8.0	747	244	13,1	2236
		225/70 R 15	100S			OWL	FR	6.0	7.5	709	237	13,5	2125
		255/70 R 15	108S			OWL	FR	6.5	8.5	753	270	13,5	2254
		265/70 R 15	112T			OWL	FR	7.0	9.0	767	282	13,5	2297
		30X9.50 R 15 LT	104S			OWL	FR	6.5	8.5	765	251	13,5	2285
		31X10.50 R 15 LT	109S			OWL	FR	7.0	9.0	791	278	13,5	2365
		33X12.50 R 15 LT	108S			OWL	FR	8.5	11.0	844	343	13,5	2519
		35X12.50 R 15 LT	113Q			BSW	FR	8.5	11.0	897	343	13,5	2675
		16"	LT235/85 R 16	120/116S			OWL	FR	6.0	7.5	822	249	13,1
	225/75 R 16		108S		XL	OWL	FR	6.0	7.5	758	232	13,5	2269
	LT245/75 R 16		120/116S			OWL	FR	6.5	7.5	788	263	13,1	2361
	LT265/75 R 16		123/120Q			OWL	FR	7.0	8.0	820	283	13,1	2450
	LT285/75 R 16		122/119Q			OWL	FR	7.5	9.0	852	303	13,5	2544
	LT295/75 R 16		123/120Q			OWL	FR	7.5	9.5	866	312	13,5	2586
	LT315/75 R 16		121Q			OWL	FR	8.0	10.0	896	332	13,5	2678
	215/70 R 16		100T			BSW	FR	5.0	7.0	720	230	11,5	2159
	235/70 R 16		106T			OWL	FR	6.0	8.0	750	250	13,5	2245
	245/70 R 16		107T			OWL	FR	6.5	8.0	764	258	13,5	2287
	255/70 R 16		111S			OWL	FR	6.5	8.5	778	270	13,5	2330
	265/70 R 16		112T			OWL	FR	7.0	9.0	792	283	13,5	2373
	17"	215/65 R 16	98T			BSW	FR	6.0	7.5	698	230	11,5	2090
255/65 R 16		109T			BSW	FR	7.0	9.0	752	270	13,5	2251	
LT305/70 R 16		118/115Q			OWL	FR	8.0	9.5	852	330	13,5	2544	
245/70 R 17		110S			OWL	FR	6.5	8.0	764	258	13,1	2287	
255/70 R 17		112S			BSW	FR	6.5	8.5	804	270	13,5	2410	
265/70 R 17		115S			OWL	FR	7.5	9.5	818	283	13,1	2450	
LT265/70 R 17		121/118Q			OWL	FR	7.0	8.5	826	288	13,5	2471	
255/65 R 17		111H			OWL	FR	7.0	9.0	778	270	13,5	2330	
265/65 R 17		112T			BSW	FR	7.5	9.5	790	283	13,1	2365	
265/70 R 18		116S			OWL	FR	7.0	9.0	843	283	13,5	2528	
LT275/70 R 18		125/122Q			OWL	FR	7.0	9.0	865	296	13,5	2589	
18"		275/65 R 18	116S			BSW	FR	7.5	9.5	829	296	13,5	2486
	LT275/65 R 18	123/120Q			OWL	FR	7,5	9.0	835	296	13,5	2504	
	255/60 R 18	112H		XL	BSW	FR	7.0	9.0	755	270	10,6	2265	
	LT285/60 R 18	122/119Q			BSW	FR	8.0	10.0	819	310	13,5	2455	
	255/55 R 18	109H		XL	BSW	FR	7.0	9.0	749	276	10,6	2248	
	305/50 R 20	120T		XL	BSW	FR	8.5	11.0	826	329	13,1	2485	